


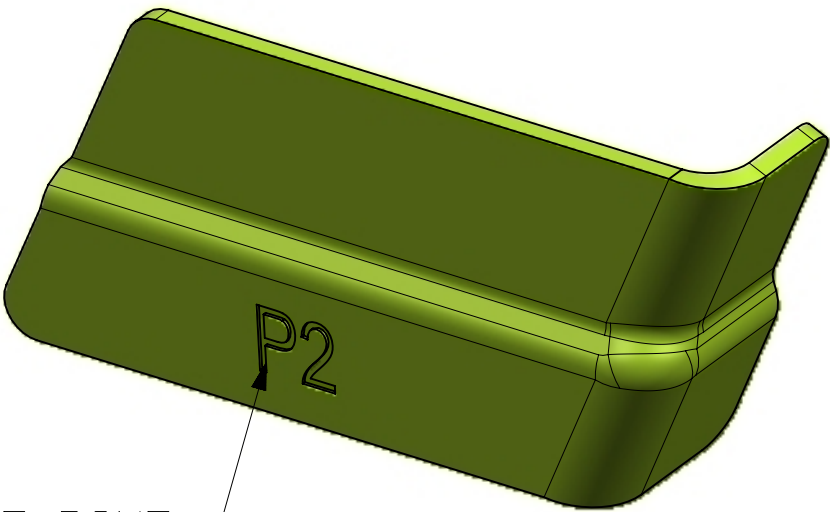


* STAMPING/ PUNCHING TO BE DONE WITH HEIGHT OF 10MM & 0.5MM DEPTH.

THIS PART IS MIRROR IMAGE OF 007545762C1 EXCEPT ** MARKED NOTE

NOTE :
-THE IGES/UG GENERATED MATHEMATICAL DATA IS MASTER FOR THE PART
-ALL UNSPECIFIED RADIUS SHOULD BE ONE METAL THICKNESS.
-PART MUST BE FREE OF STRETCHING, SCORING MARKS AND WRINKLES.
-PART MUST BE FREE OF FRACTURE, BURRS & SHARP EDGES AND ANY SURFACE IMPERFACTIONS, THAT MAY AFFECT FIT OR FUNCTION OF THE PART.

ER18C0005269	AA		DRAWING SHEET ADDED WITH VIEW, STAMPING NOTE ADDED FOR IDENTIFICATION	TRD	TRD	VB	30/7/18
ECN/ ER NO	CL	LOC	REVISIONS	DSNR	CKR	APPR	DATE

<SC> :SIGNIFICANT CHARACTERISTICS										▽ :CRITICAL CHARACTERISTICS		
BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.					MAHINDRA & MAHINDRA LIMITED TRACTOR DIVISION KANDIVLI (EAST), MUMBAI 400 101, INDIA.							
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989					E.R. / PROC.REQ.NO : ER18C0005269			PART NO. : 007545763C1				
UNSPECIFIED TOLERANCES 1. FORMING TO FORMING UPTO 500 ±0.5 ABOVE 500 ±0.8 2. CD BETWEEN HOLES IN ONE PLANE ±0.2 IN DIFF PLANES ±0.5 3. FORM TO PIERCE ±0.5 4. ANGULAR TOLERANCE ±1° 5. HOLE SIZES ±0.2/0 6. SLOT SIZES ±0.8 7. GENERAL TOLERANCES UP TO 300 ±0.8 ABOVE 300 ±1.0 8. FLANGE WIDTH +1.0/-0.7 9. JOGGLE DEPTH +0.3/0					PART NAME : FOOT STEP EXTENSION REAR							
					MATERIAL : MM13-410 3mmTHK AS PER G000169				HEAT TREATMENT :			
						NAME	SIGN	DATE	FIRST USED TRCR. MODEL			
					CAD ENGG.	EC		6/1/15	MSTAR P-11			
					DESIGNER	AVA		6/1/15	SCALE 1 : 1			
PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.					CHECKER		OVK		6/1/15		SHEET 1 OF 1	
					APPR.BY		DHM		6/1/15		UNIT QTY. : 1	
COMPUTER GENERATED DRAWING			DO NOT CHANGE MANUALLY							WEIGHT :0.15 kg. EACH		
IF IN DOUBT, ASK		DO NOT SCALE		DRG SIZE : A3		ALL DIMENSIONS ARE IN mm.			CHECK DRG WITH LATEST CHANGE No			